

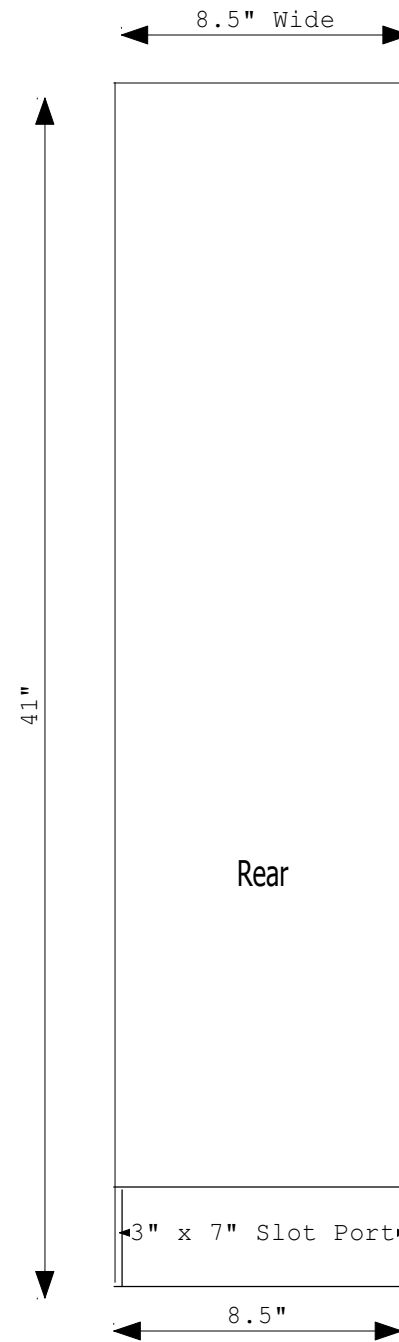
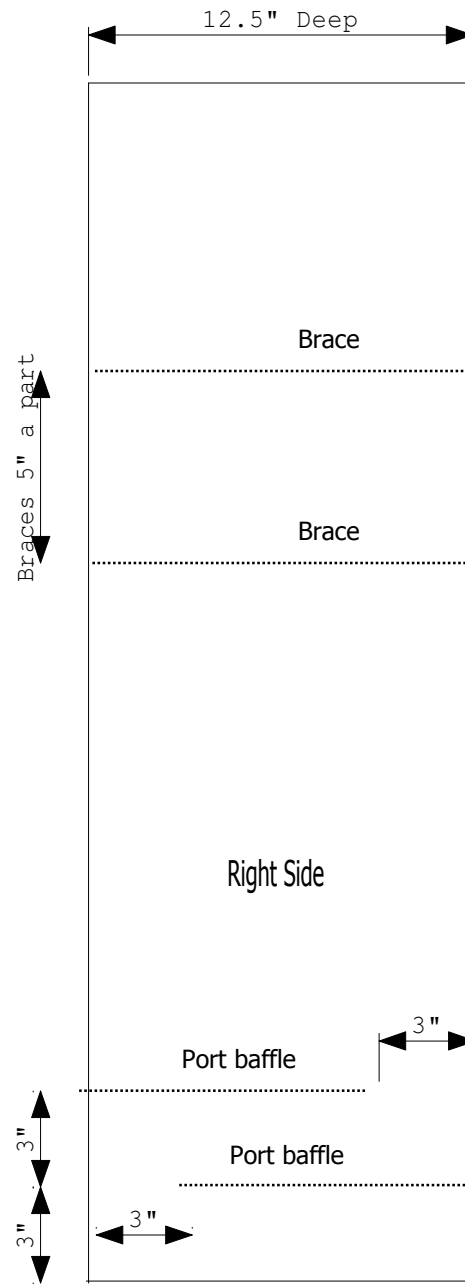
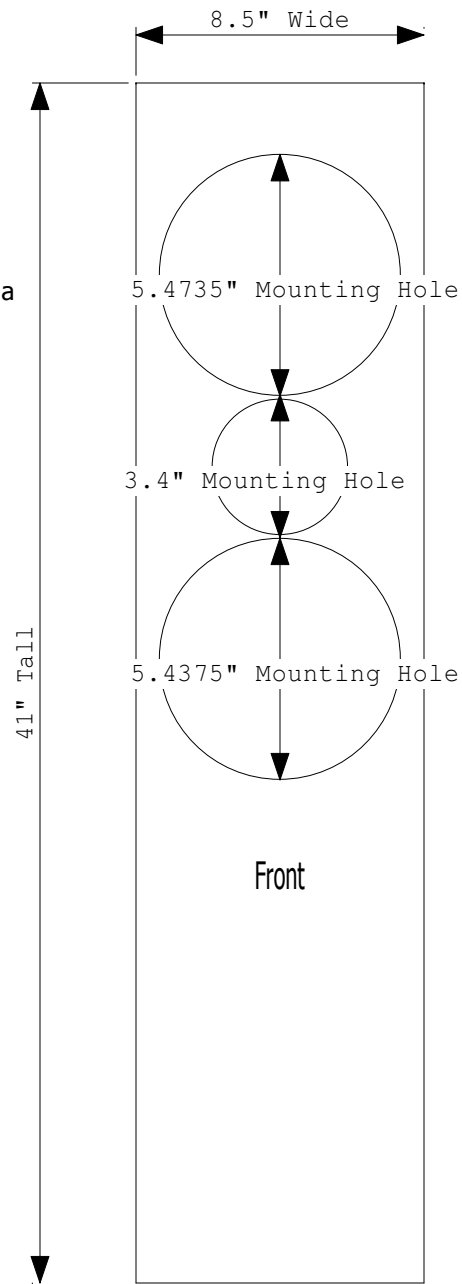


Built using .750" material.  
 Note the front is Made up of a double layer of .750" material for a thickness of 1.5"

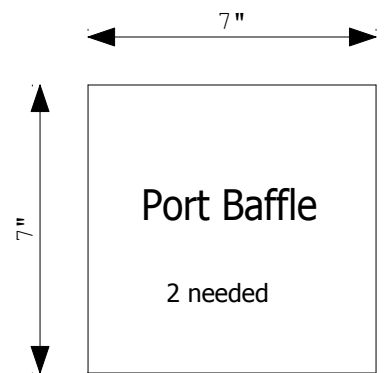

Basic Line Drawing, Not to Scale

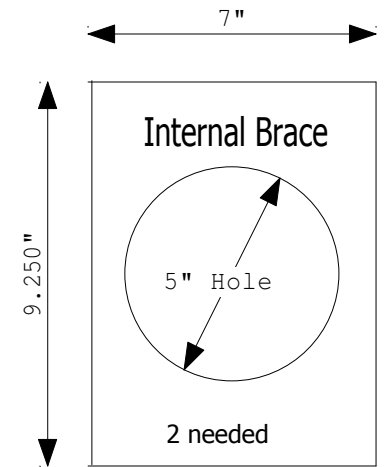

Woofers are Mavin 6.5" Stiff Cone 6 ohm drivers, wired in parallel  
 Cerwin Vega LSE-GF2060 tweeter 4 ohm  
 Using the Mavin 4 ohm 2 way crossover ( 3400 Hz crossover point )

Mavin Dual 6.5" 2 way speaker design D-65  
 4 ohms 200 watts RMS - Slot Loaded Port  
 jep 10-19-2011